




4500 Series - Standard Slide

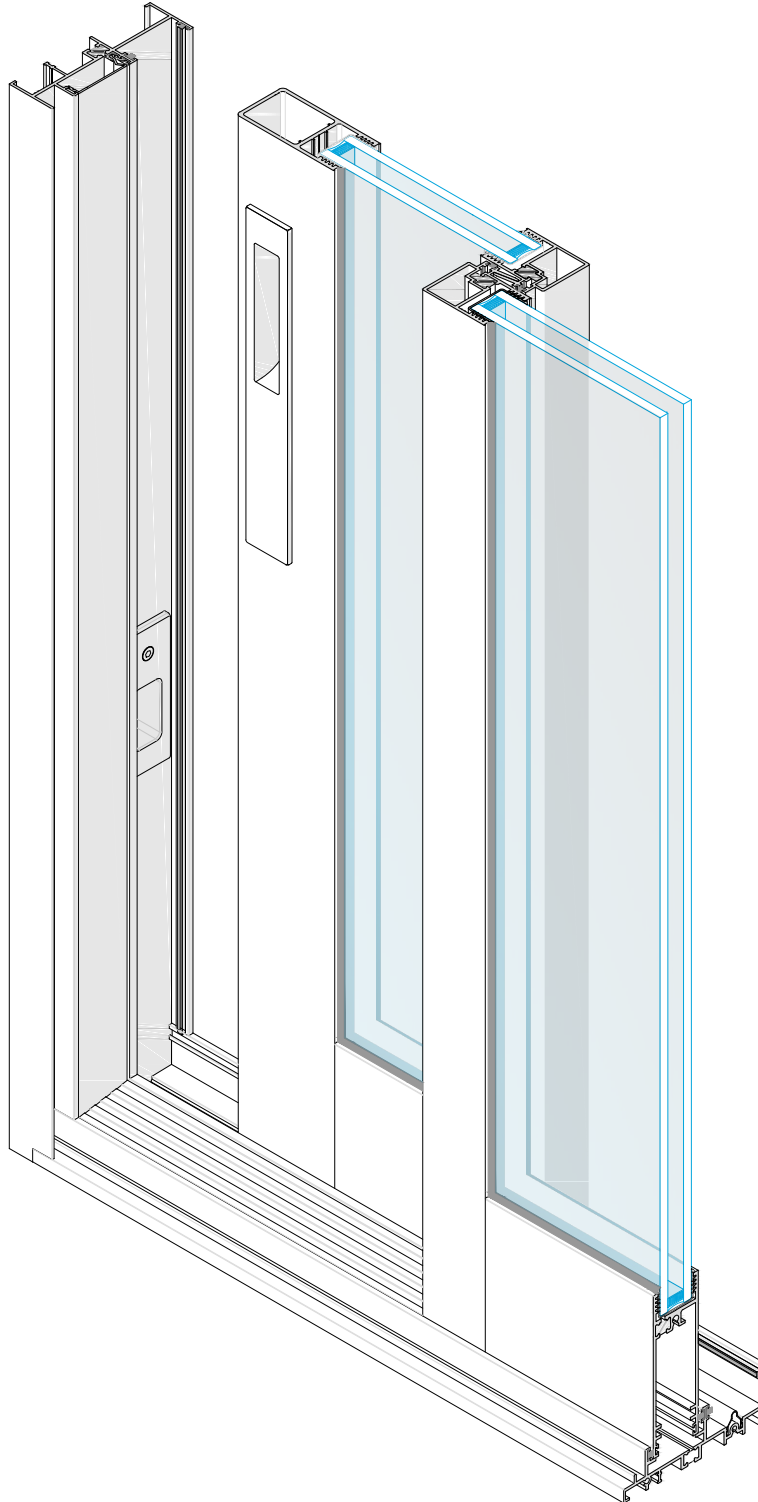


4500 Series - Standard Slide

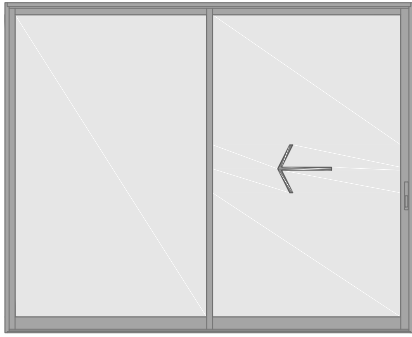


O X Configuration

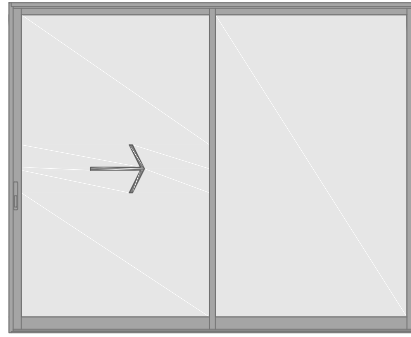

X O Configuration

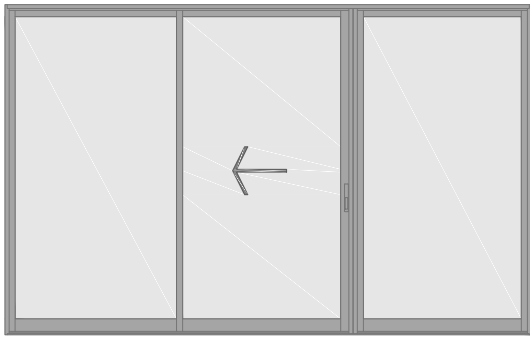


O X O R Configuration

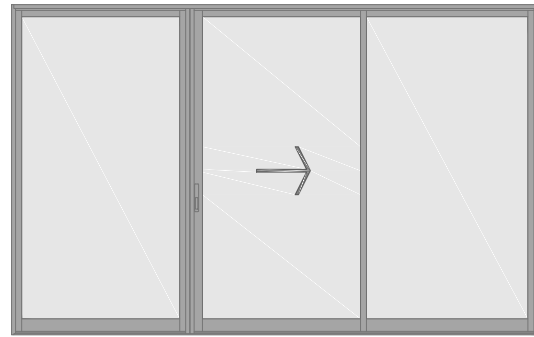

O X O L Configuration




O O X Configuration

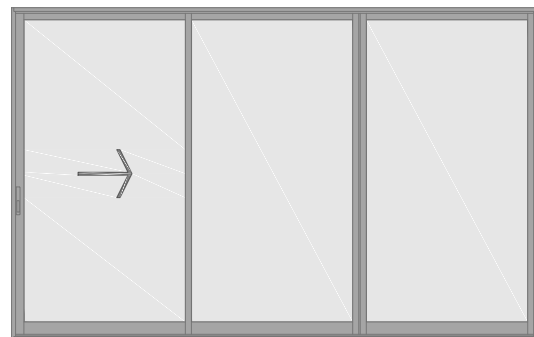

X O O Configuration





O X X O Configuration

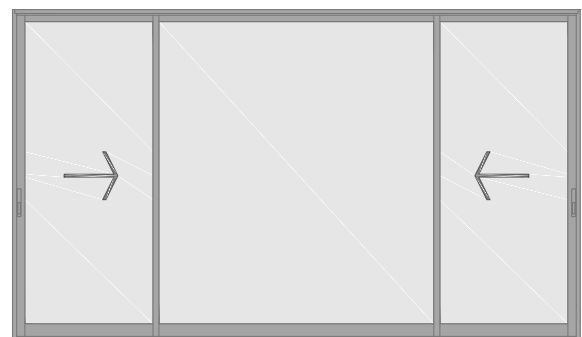

X O X Configuration


4500 Series - Standard Slide

O X Configuration

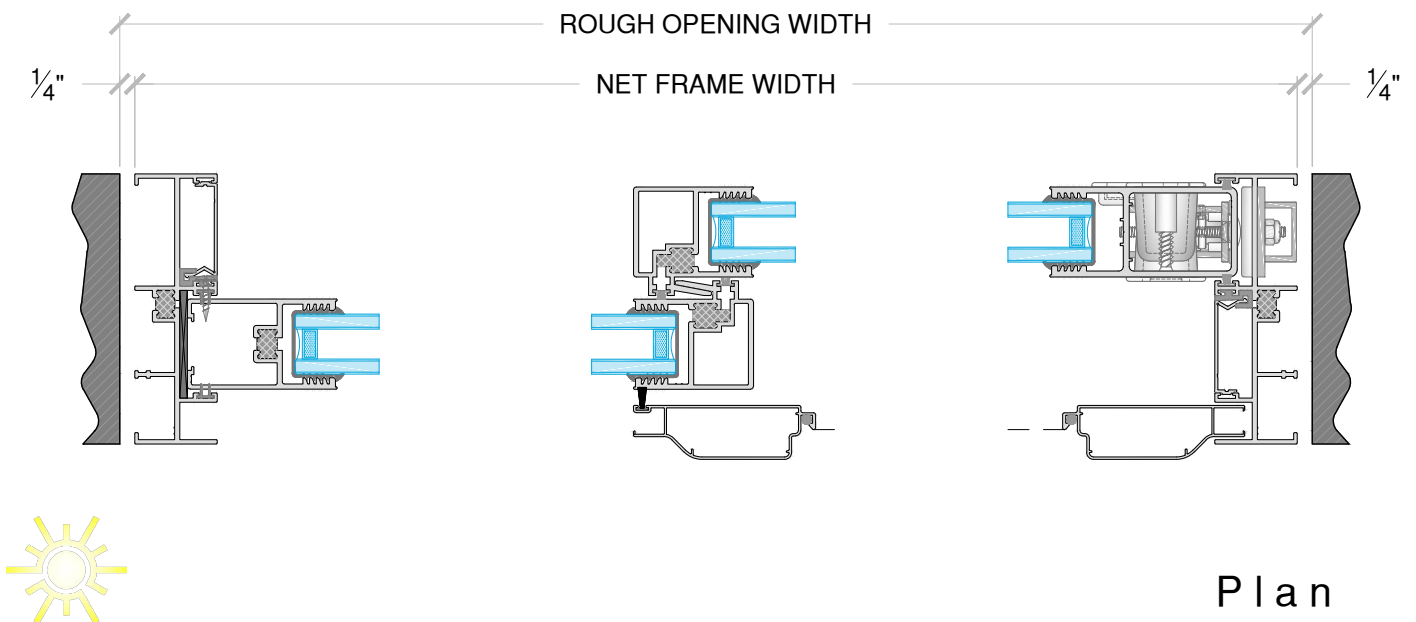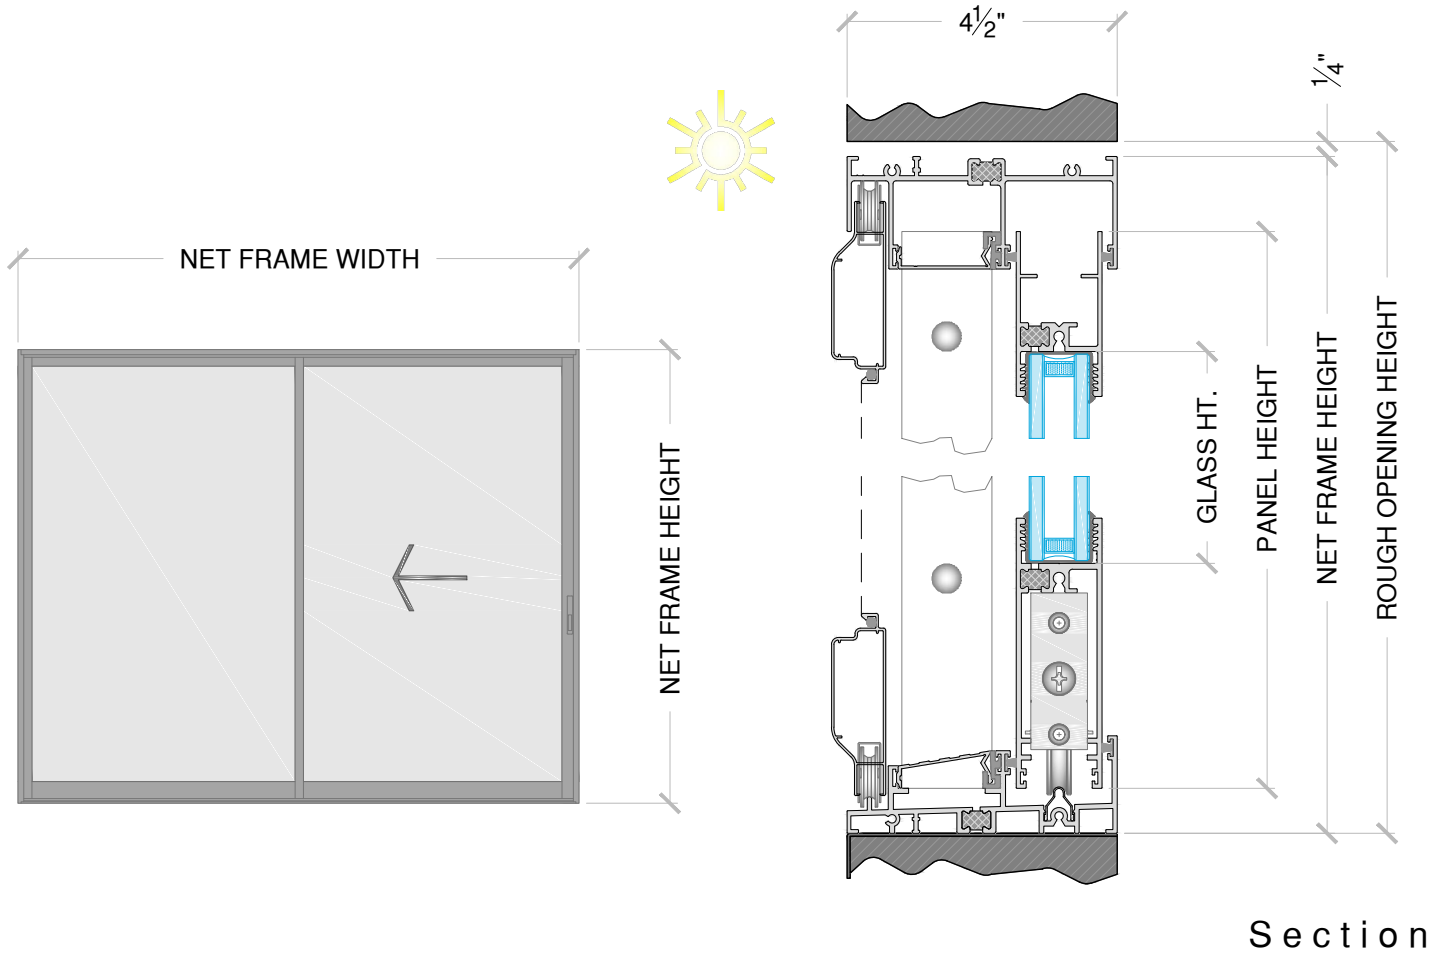


4500 Series - Standard Slide

X O Configuration

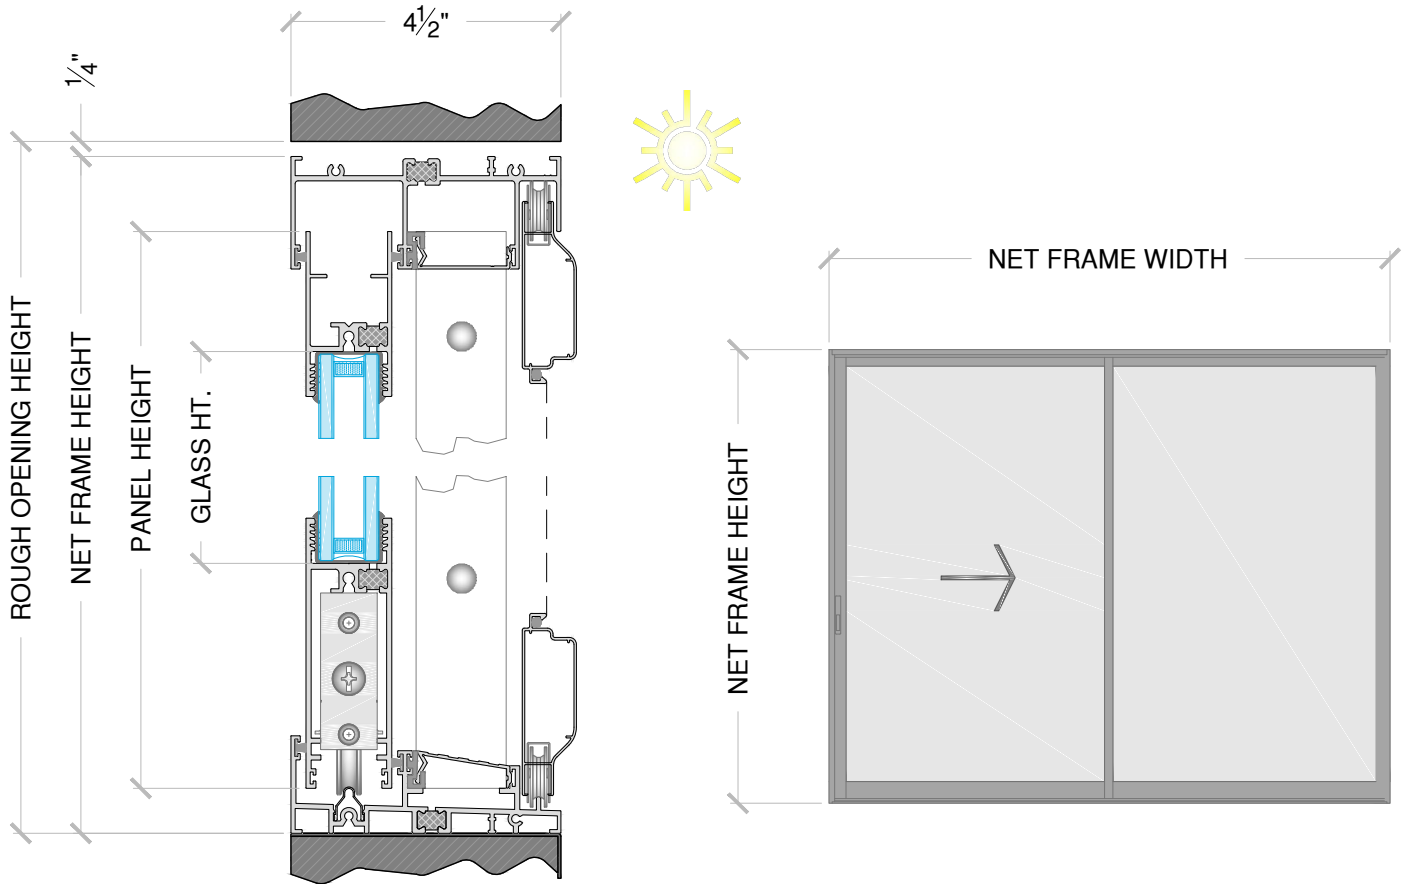


Section

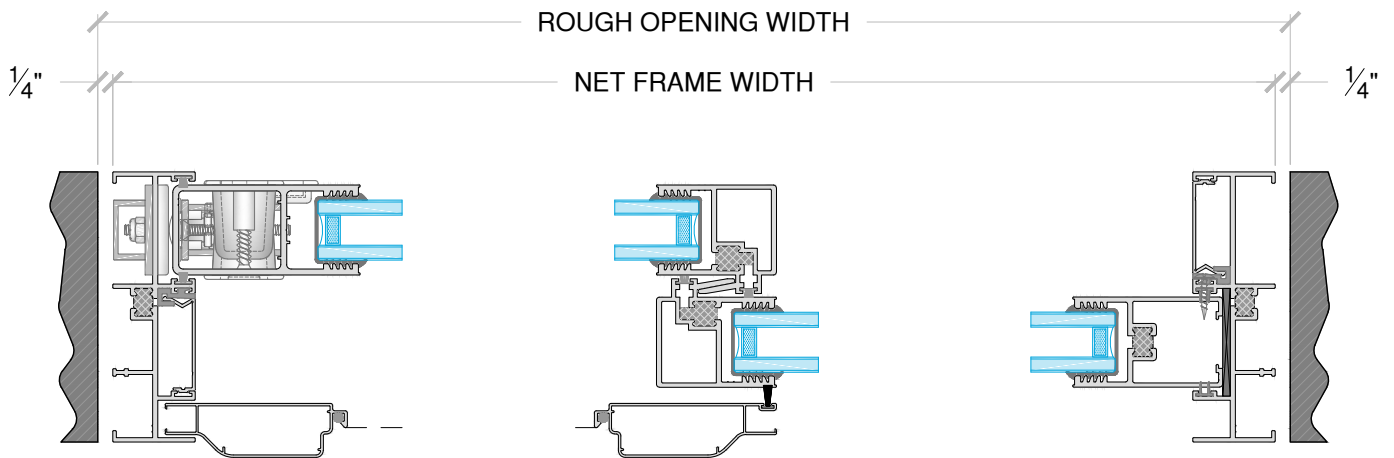


Plan

4500 Series - Standard Slide

O X O R Configuration

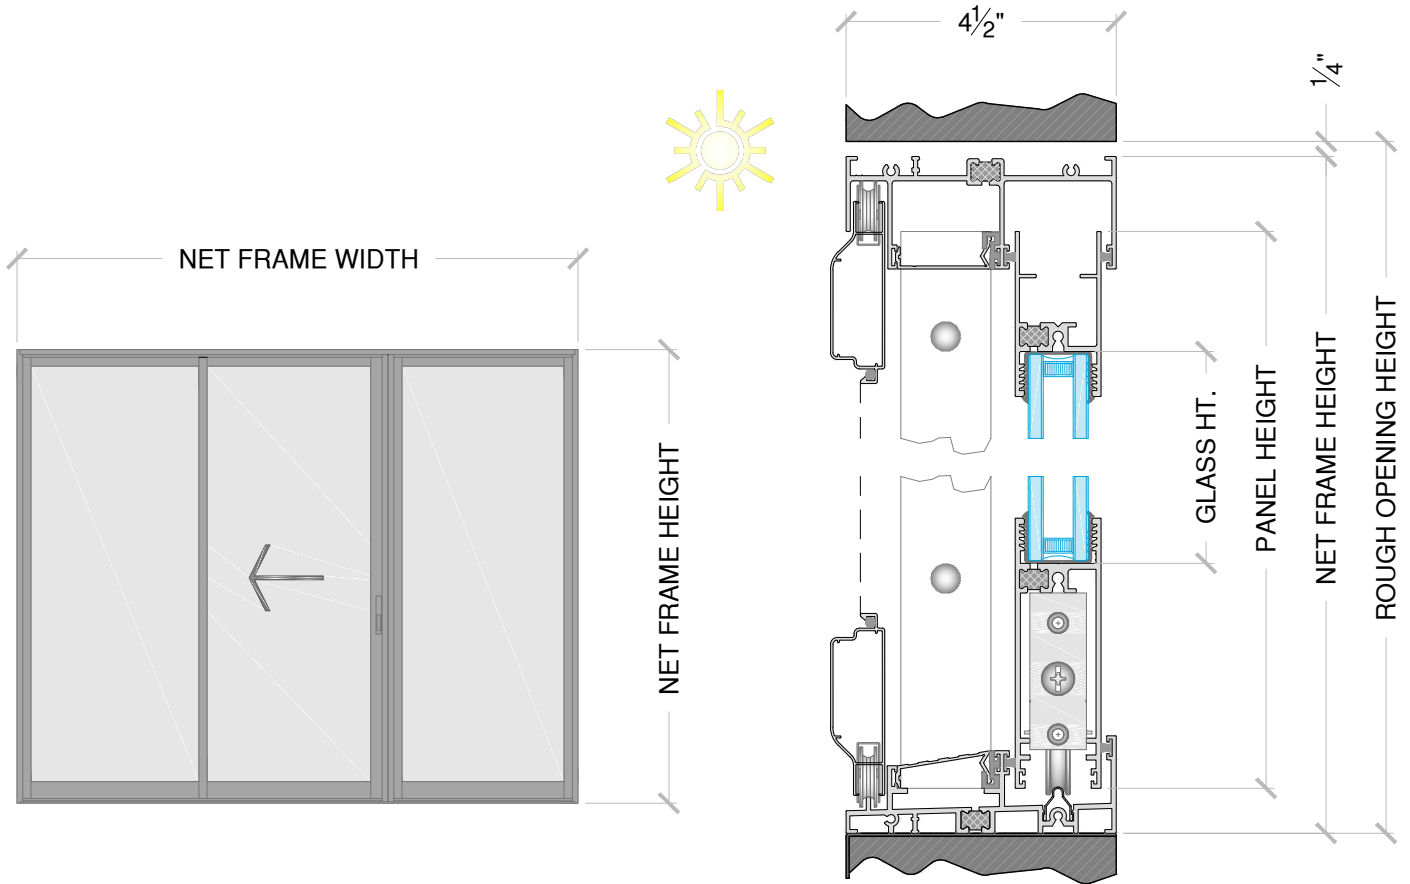

Section

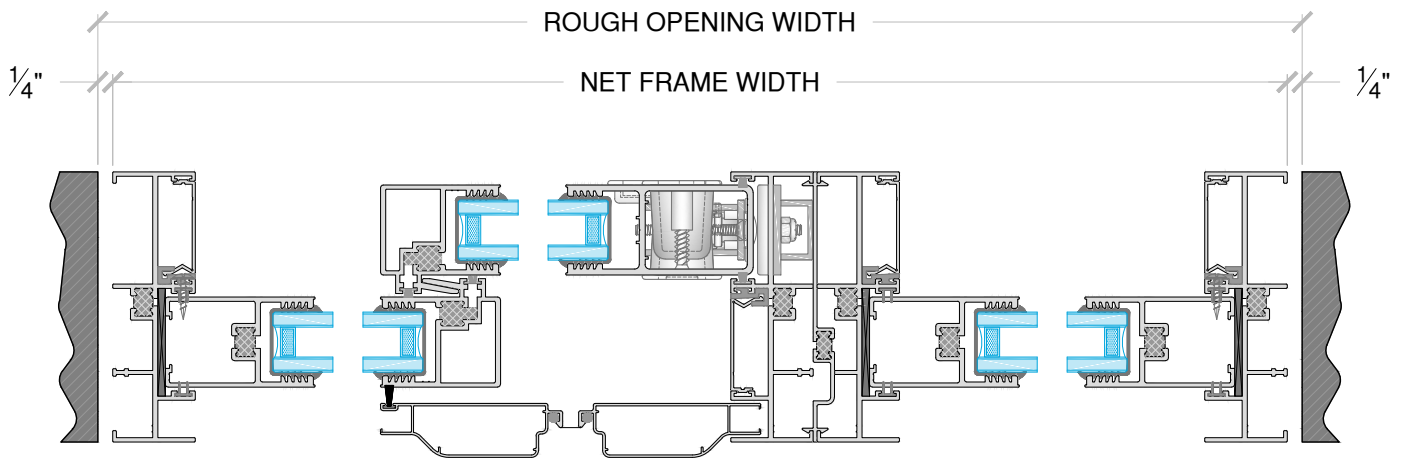


Plan




4500 Series - Standard Slide

O X O L Configuration

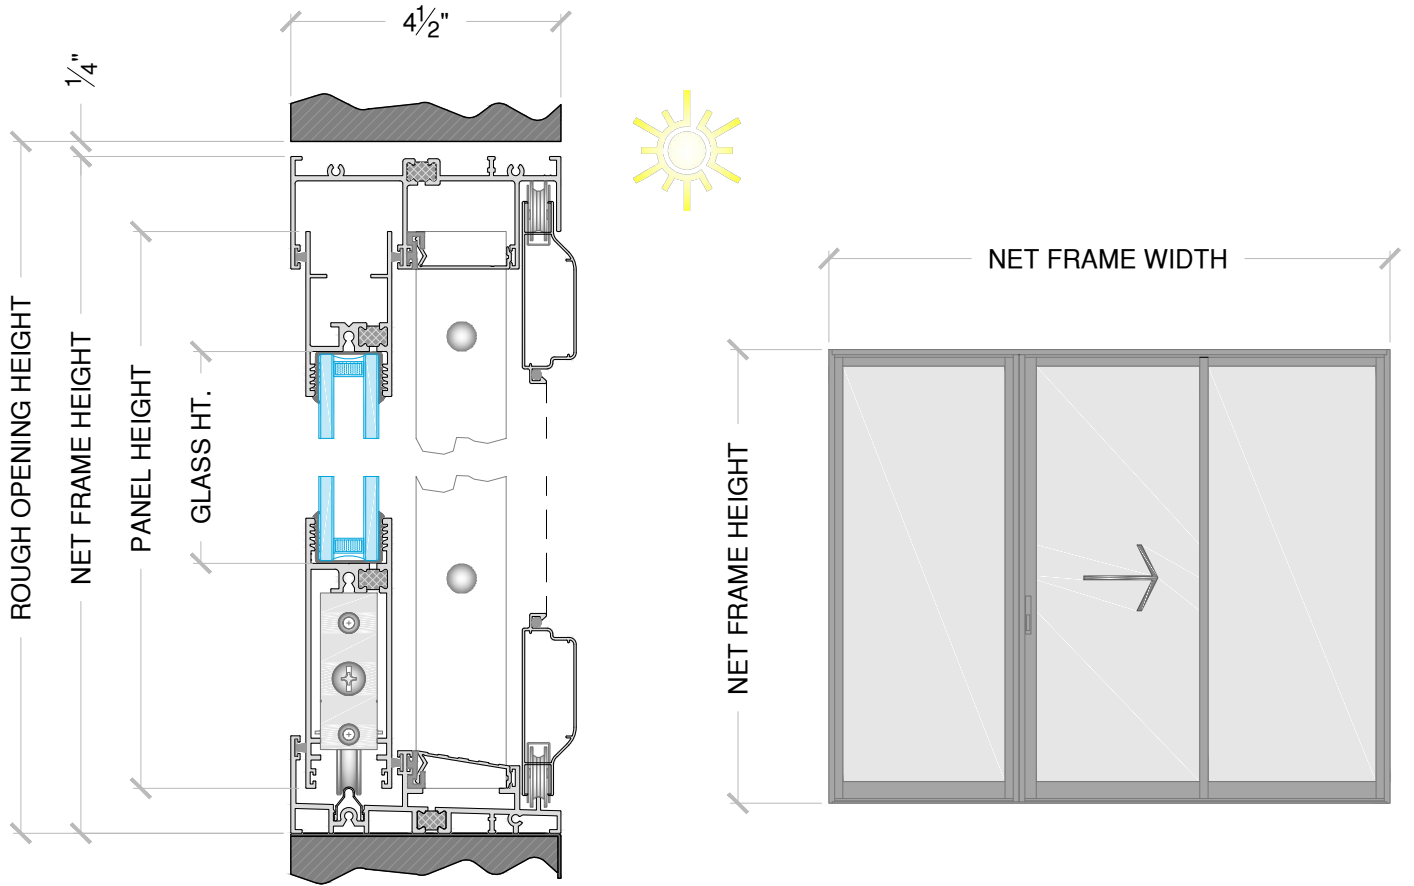



Section

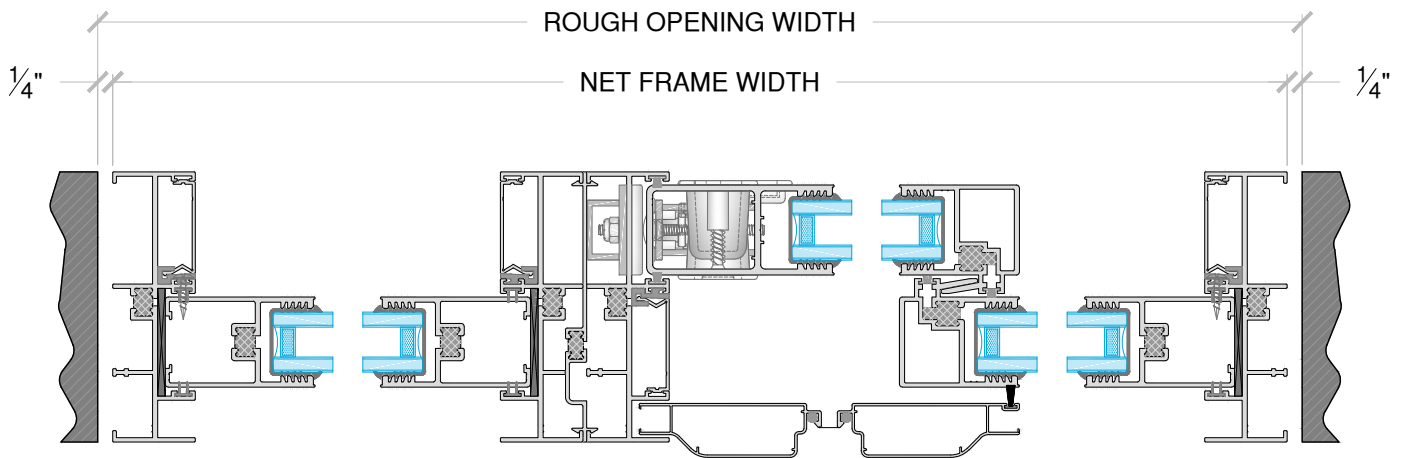

Plan


4500 Series - Standard Slide

OOX Configuration

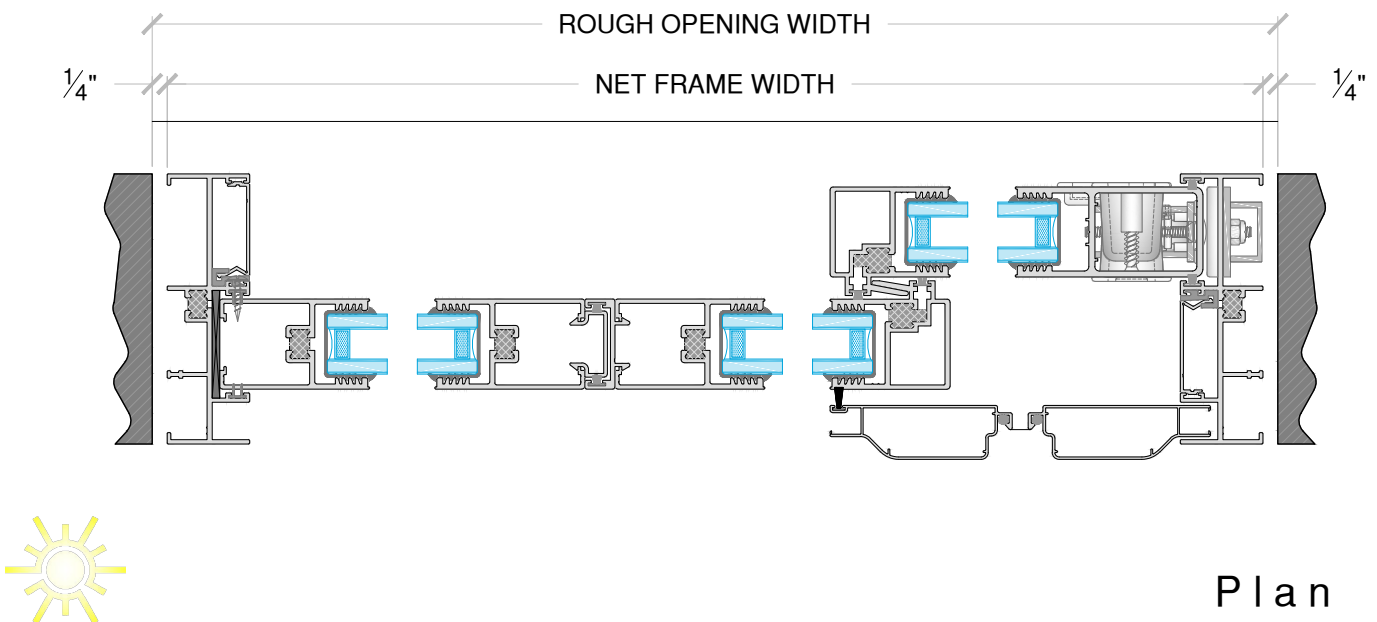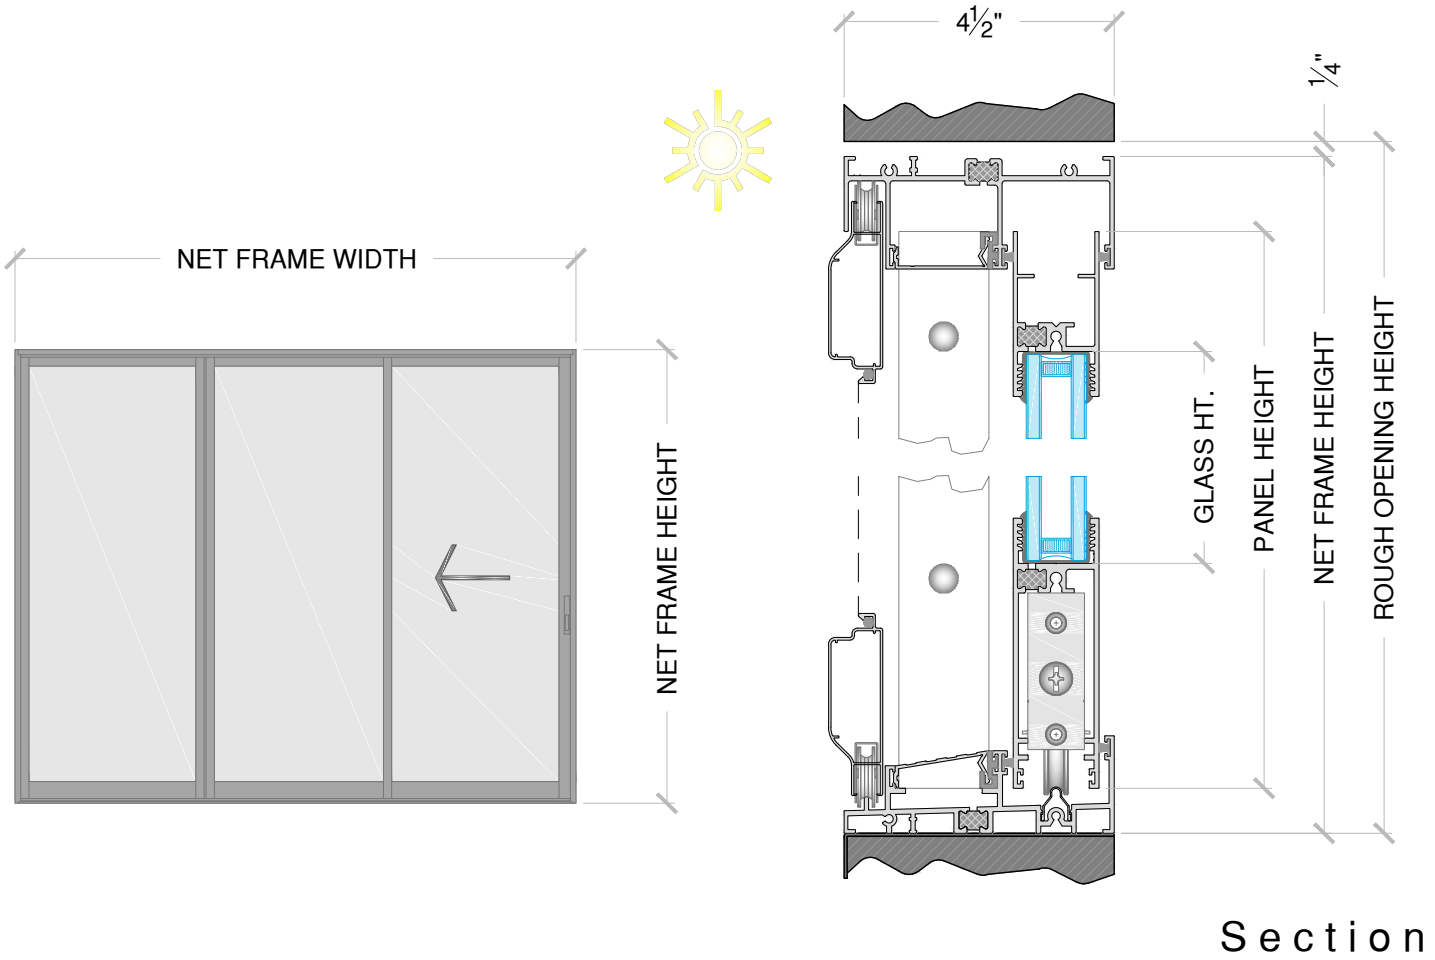


4500 Series - Standard Slide

X O O Configuration

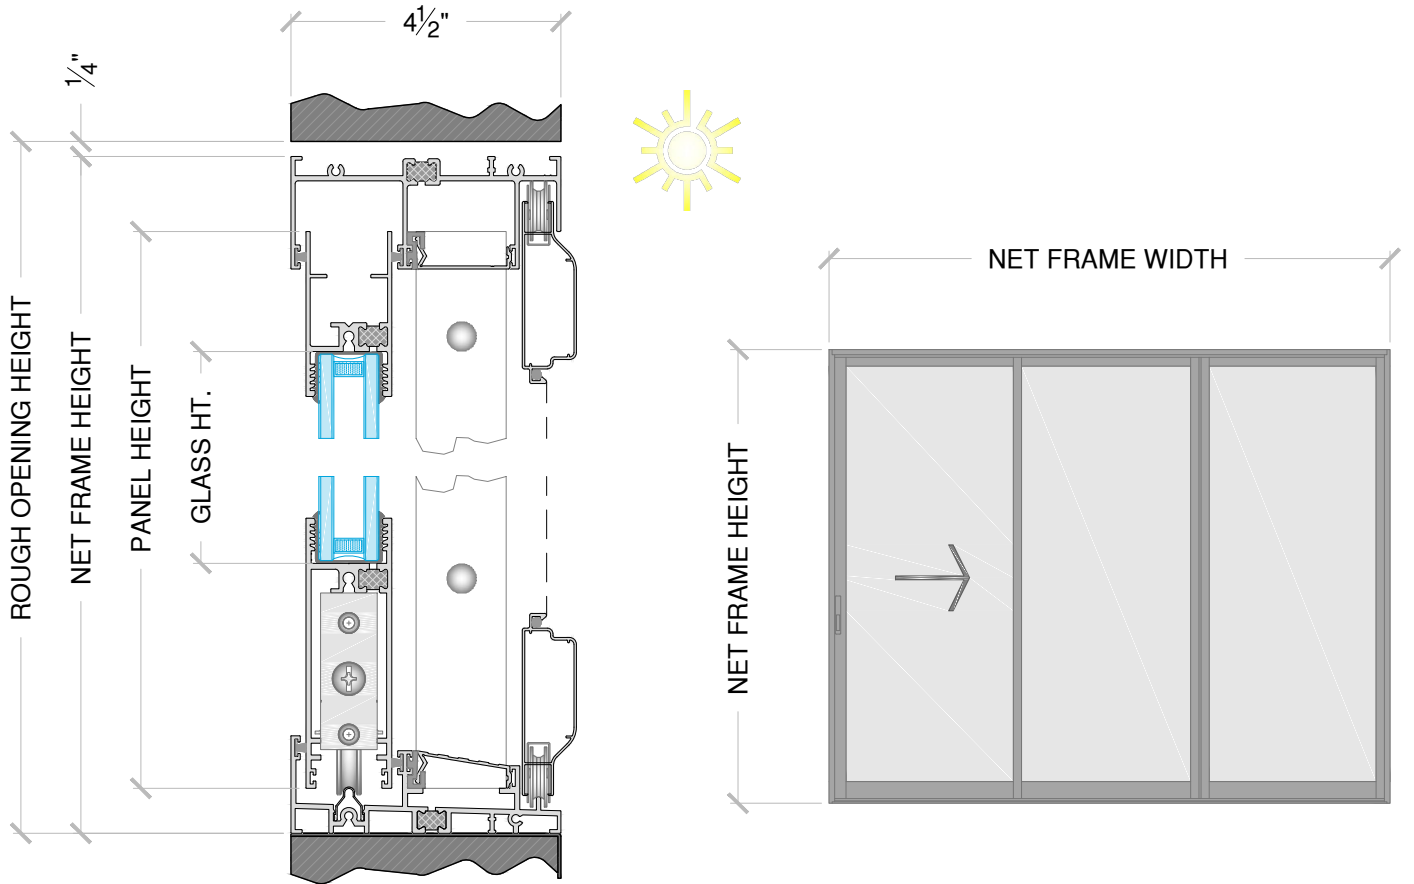



Section

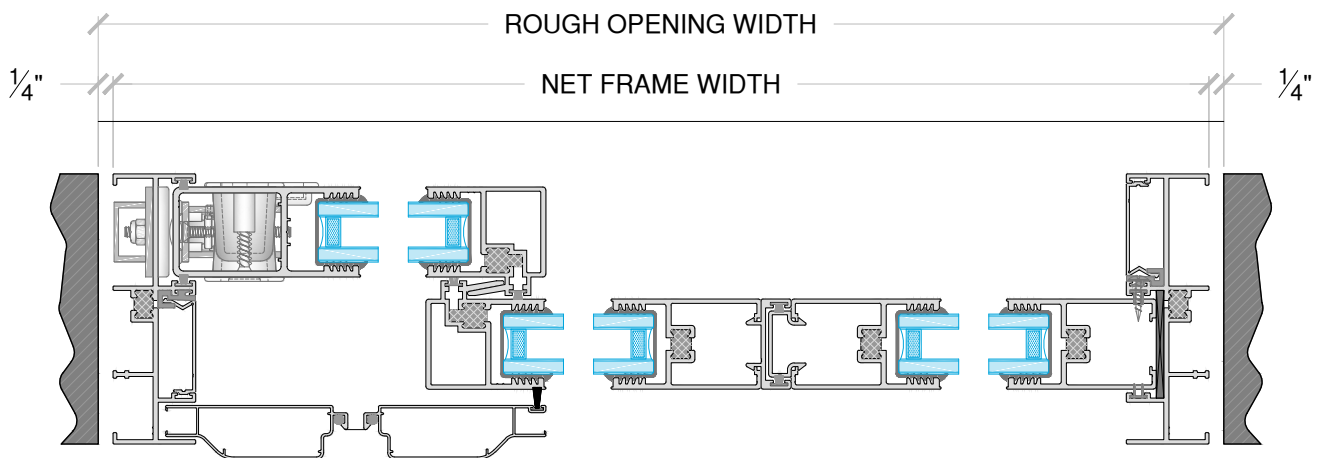

Plan



4500 Series - Standard Slide

O X X O Configuration

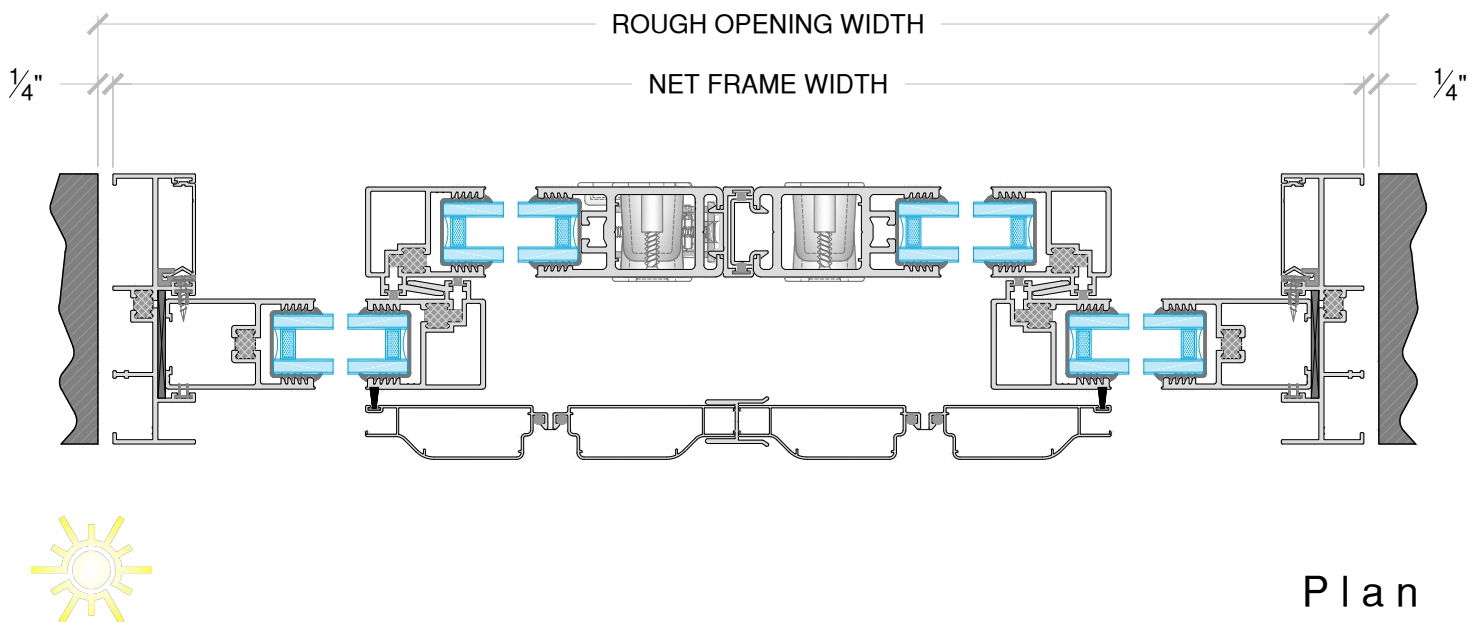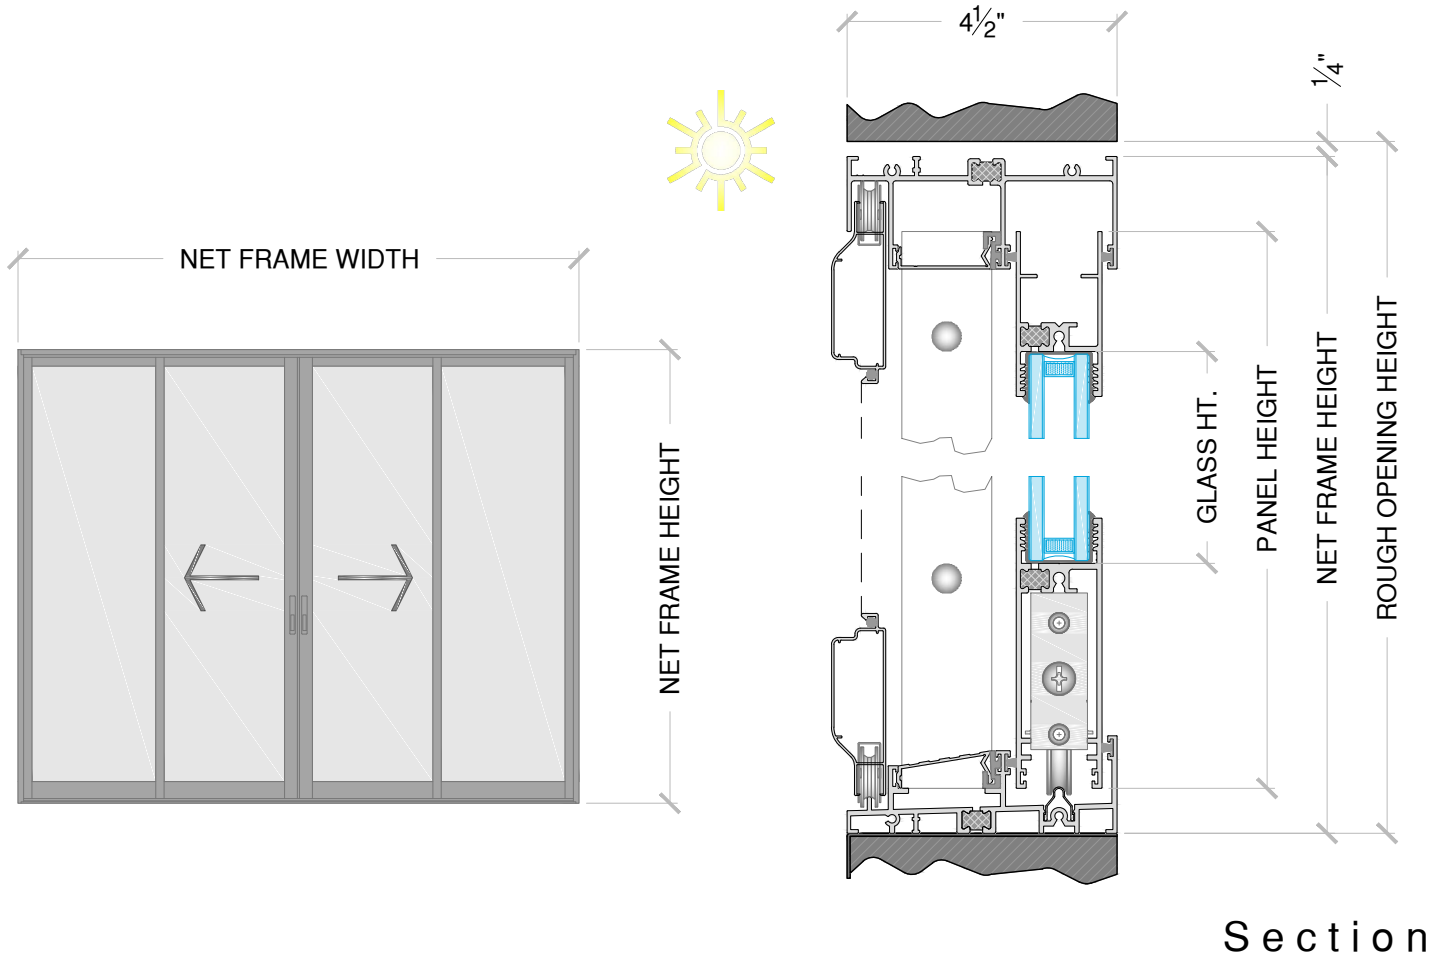


4500 Series - Standard Slide

X O X Configuration

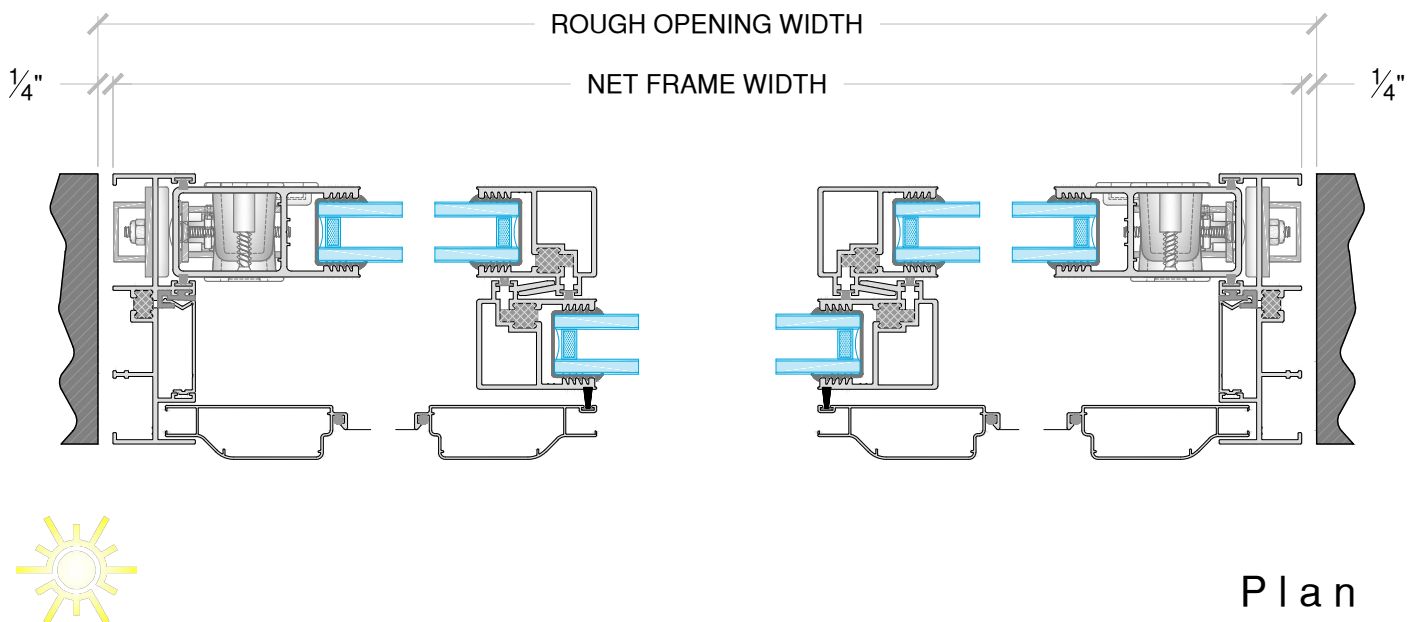
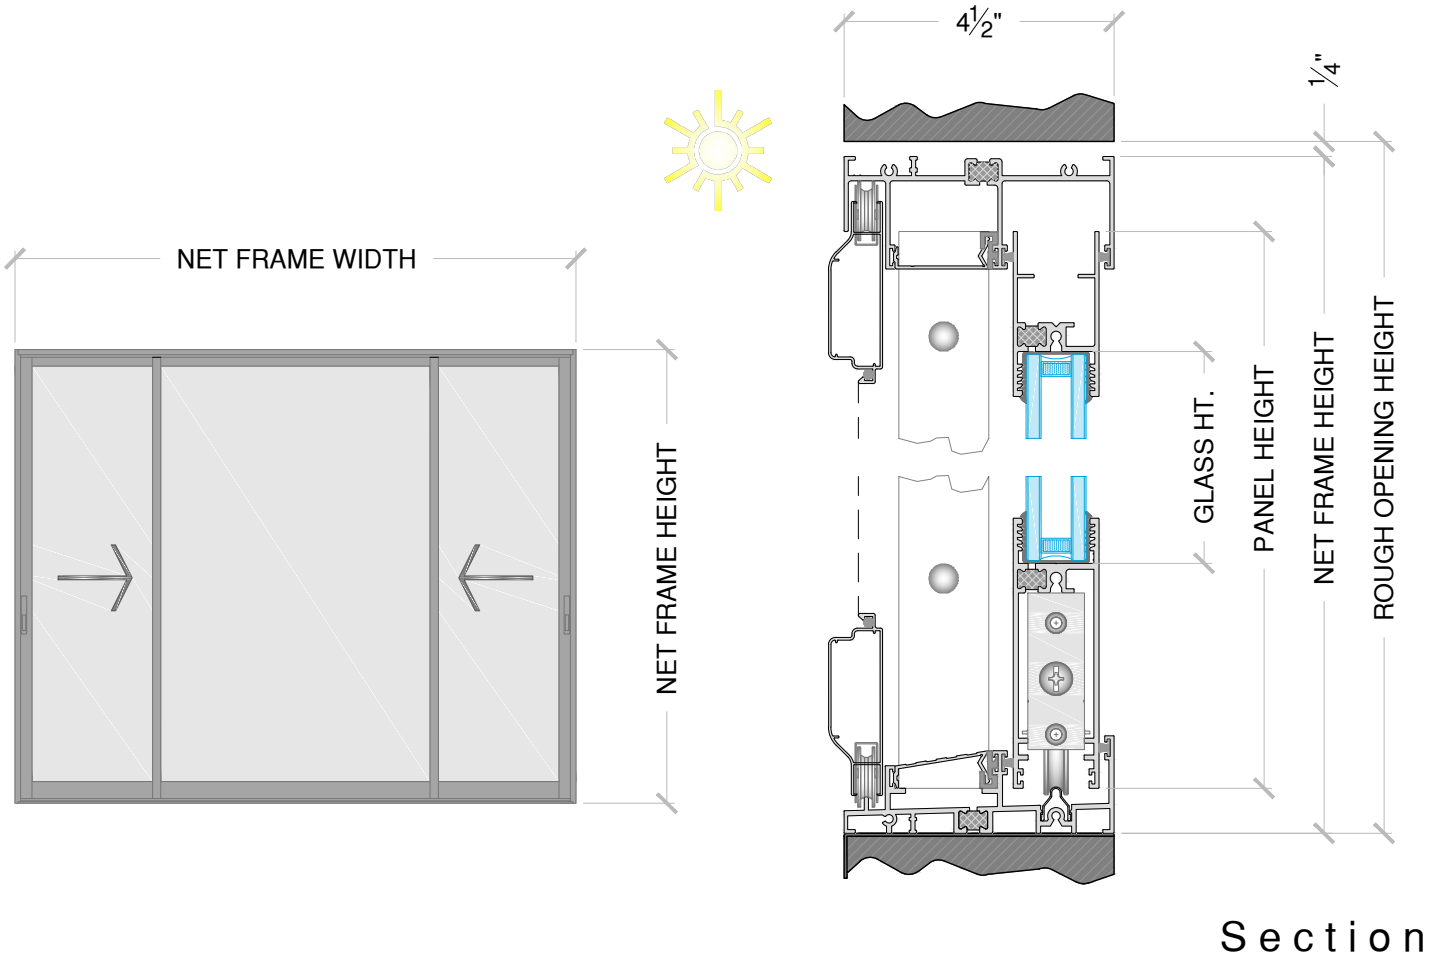


4500 Series - Standard Slide



Configurations:

- | | |
|------|------|
| XO | OX |
| OXOR | OXOL |
| OOX | XOO |
| OXXO | |
| XOX | |

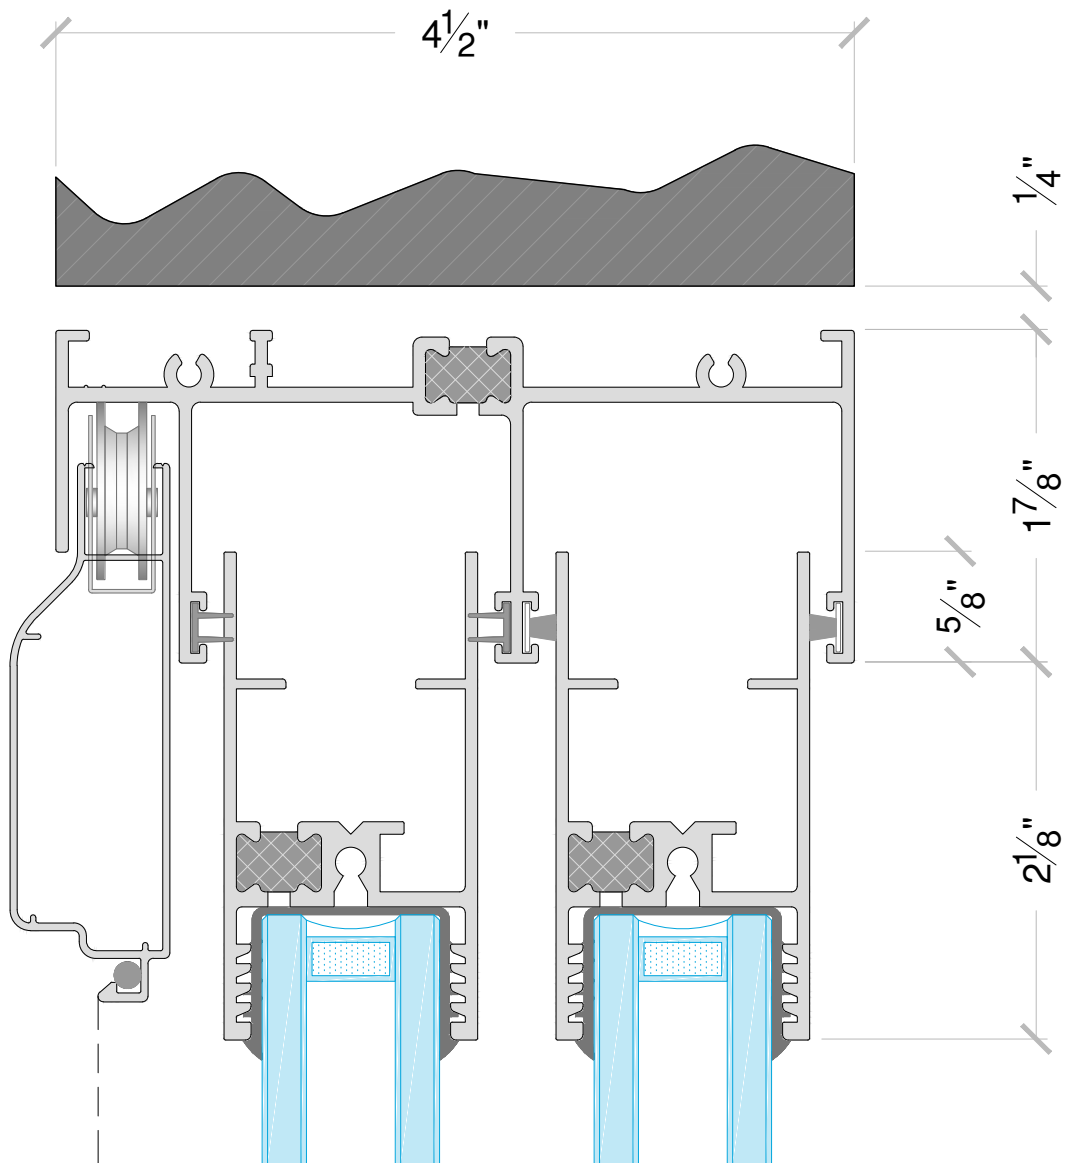




1

Standard Slide Head

4500 Series - Standard Slide

Configurations:

XO	OX
OXOR	OXOL
OOX	XOO
OXXO	

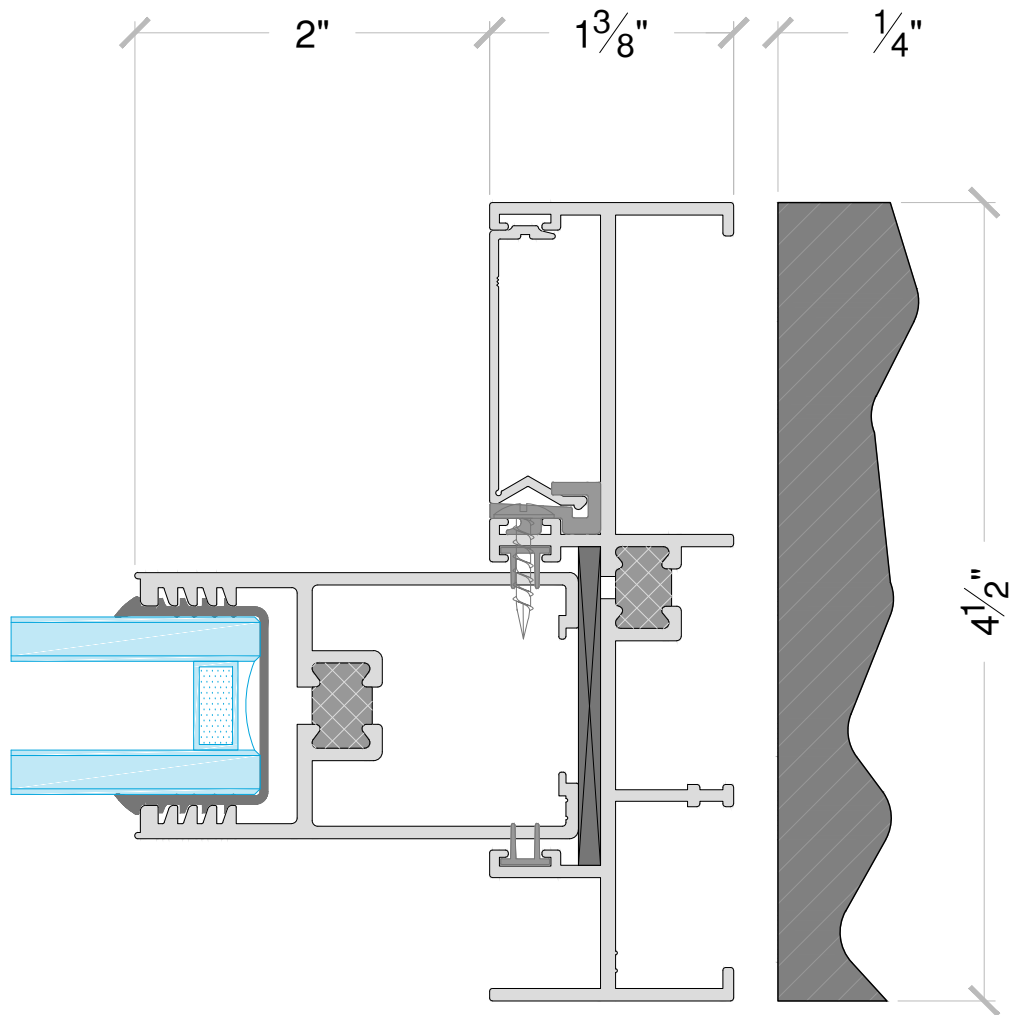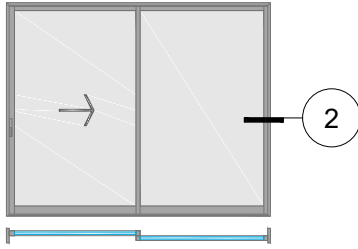




2

Standard Slide Locking Jamb

4500 Series - Standard Slide

Configurations:

- | | |
|------|------|
| XO | OX |
| OXOR | OXOL |
| OOX | XOO |
| OXXO | |
| XOX | |

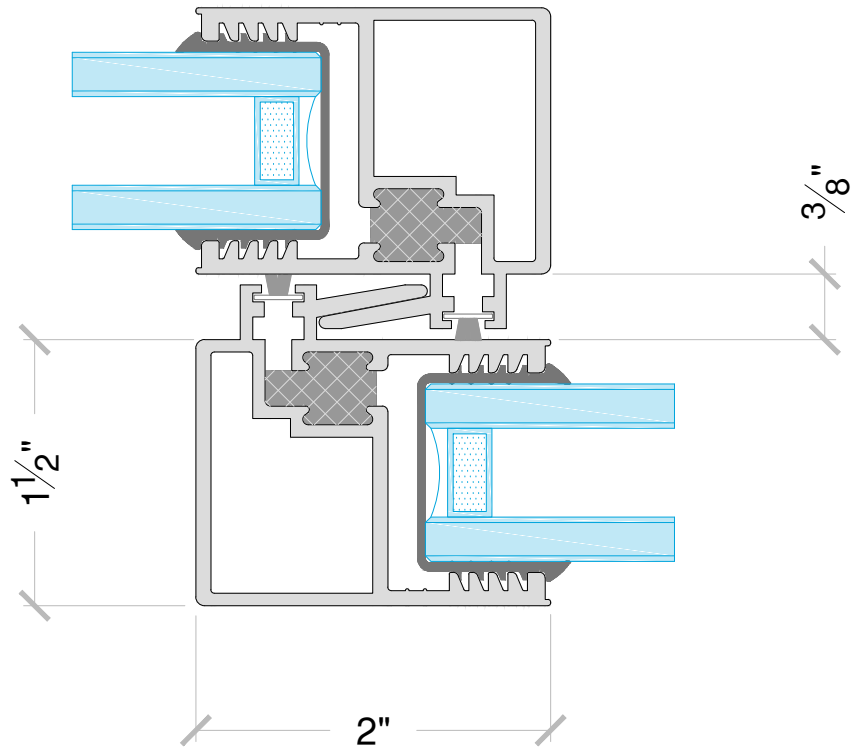




3

Standard Slide Interlocks

4500 Series - Standard Slide

Configurations:

XO	OX
OOX	XOO
XOX	

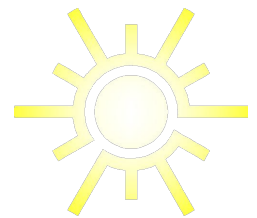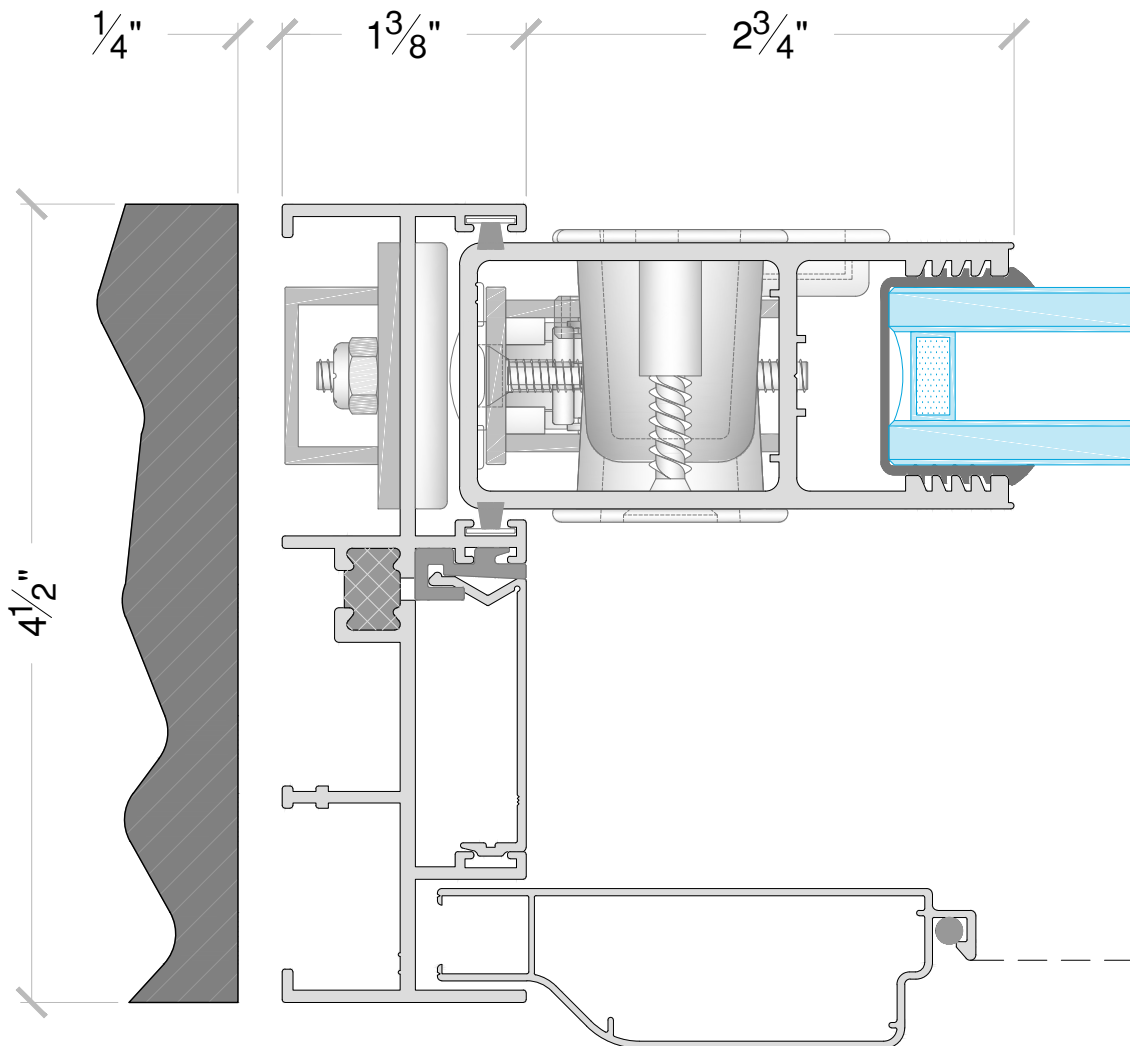
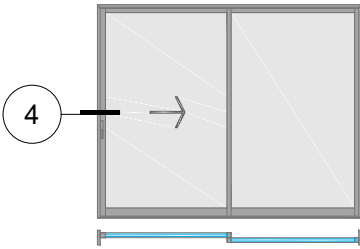


4a Standard Slide Lock Jamb
- Closed Lock Stile

4500 Series - Standard Slide

Configurations:

XO	OX
OOX	XOO
XOX	

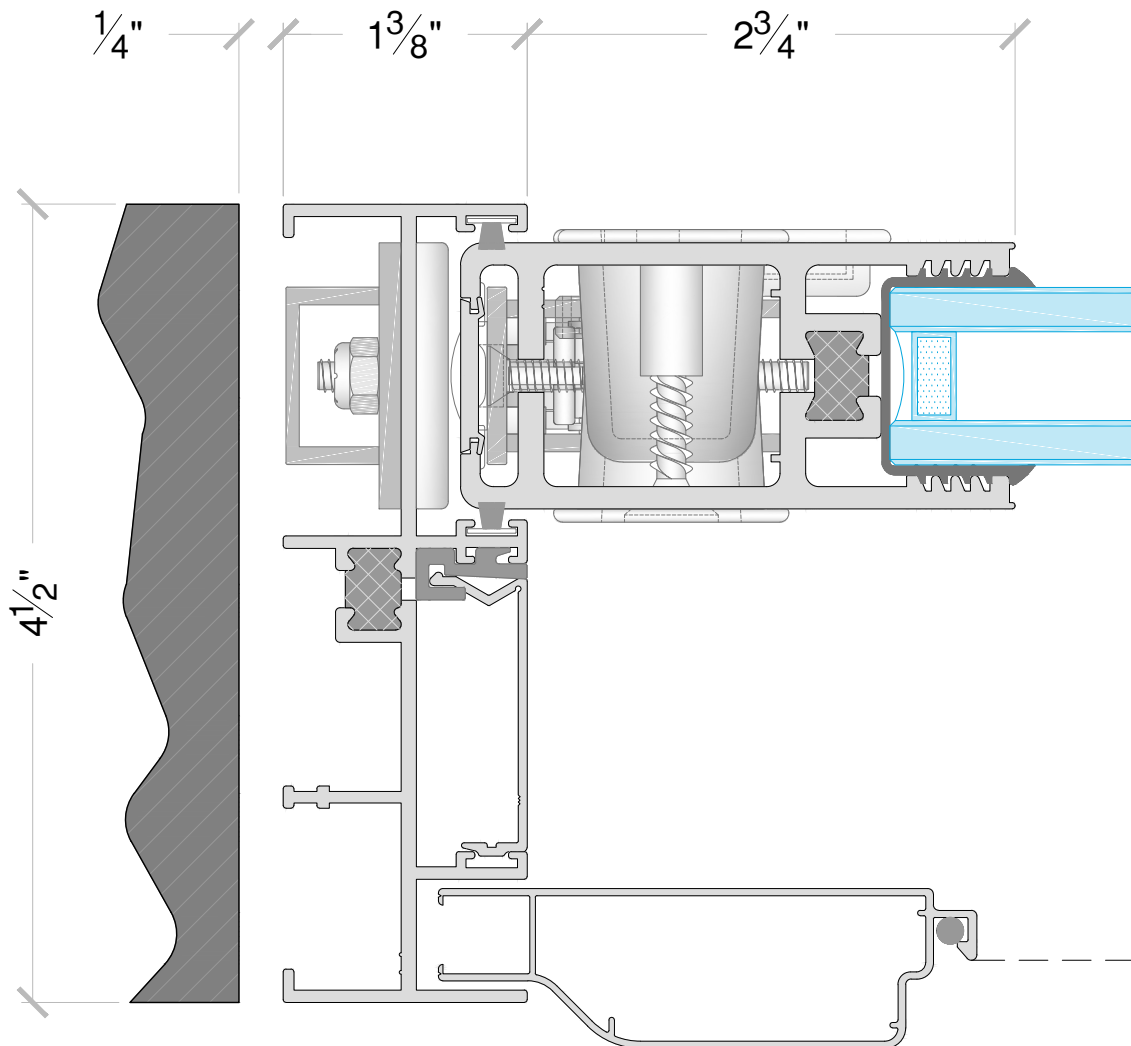
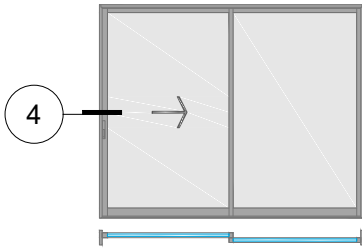


4b Standard Slide Lock Jamb
- Open Back Lock Stile

4500 Series - Standard Slide

Configurations:

- | | |
|------|------|
| XO | OX |
| OXOR | OXOL |
| OOX | XOO |
| OXXO | |
| XOX | |

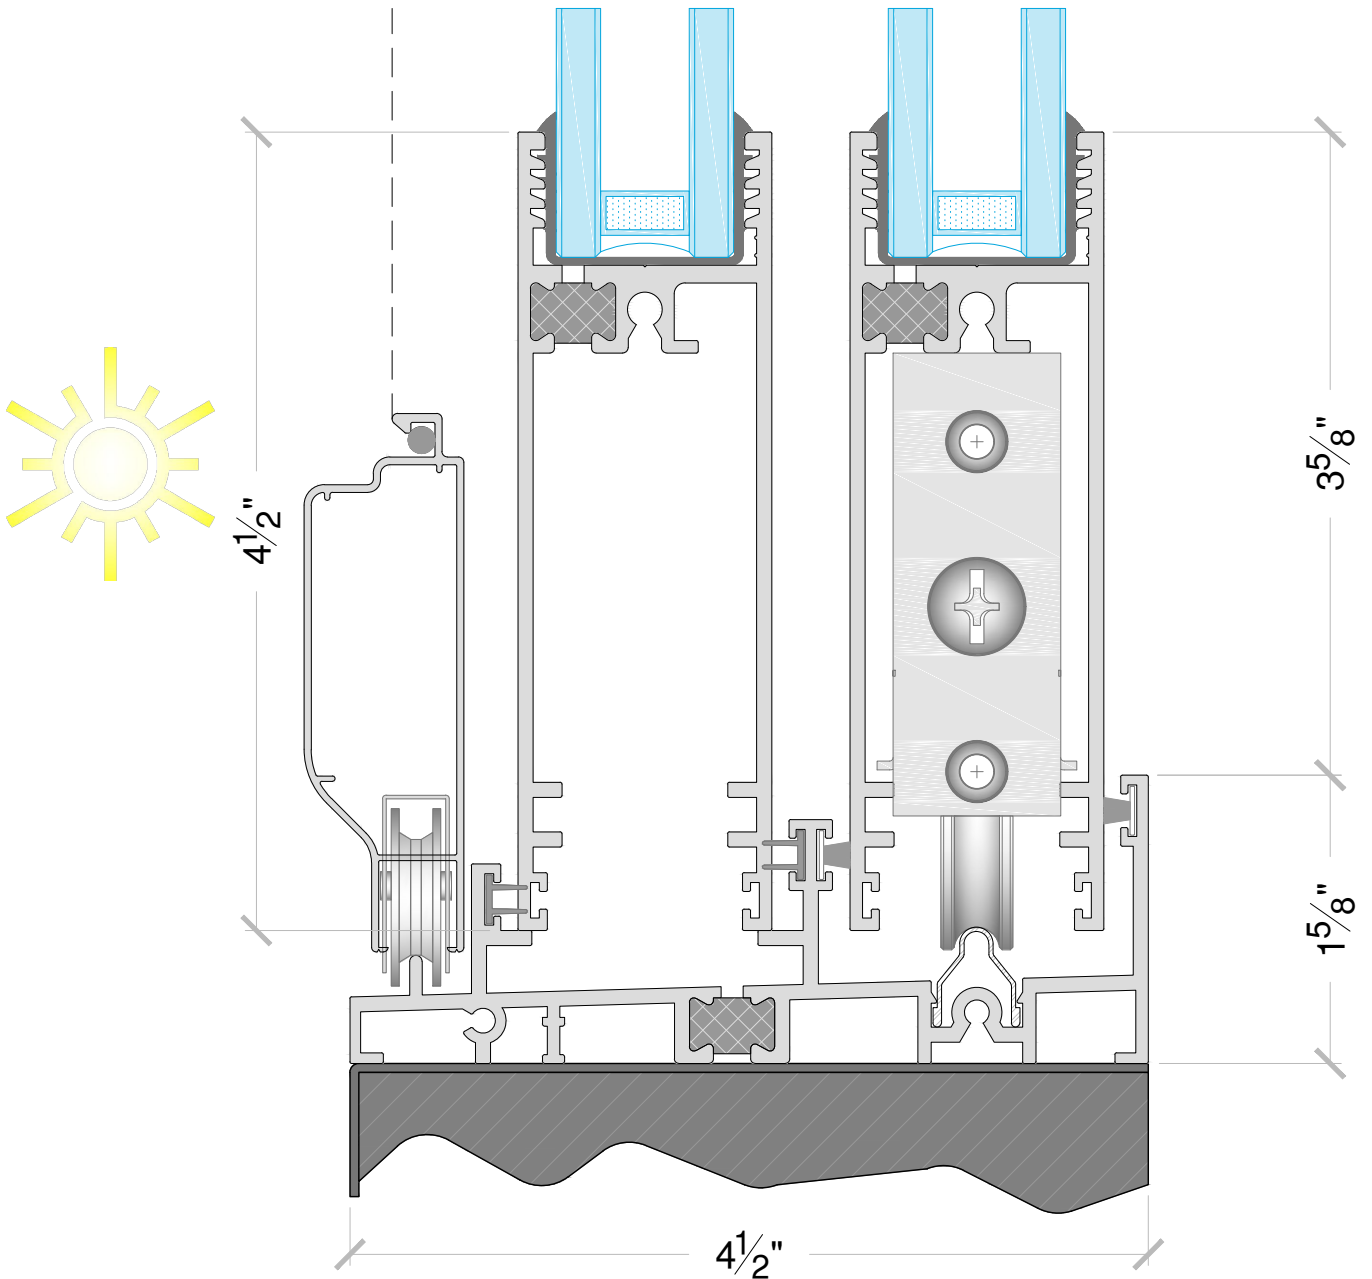
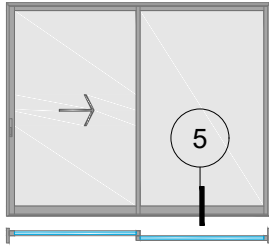


5a Standard Slide Sill w/ 4.50" Rail

4500 Series - Standard Slide

Configurations:


- | | |
|------|------|
| XO | OX |
| OXOR | OXOL |
| OOX | XOO |
| OXXO | |
| XOX | |

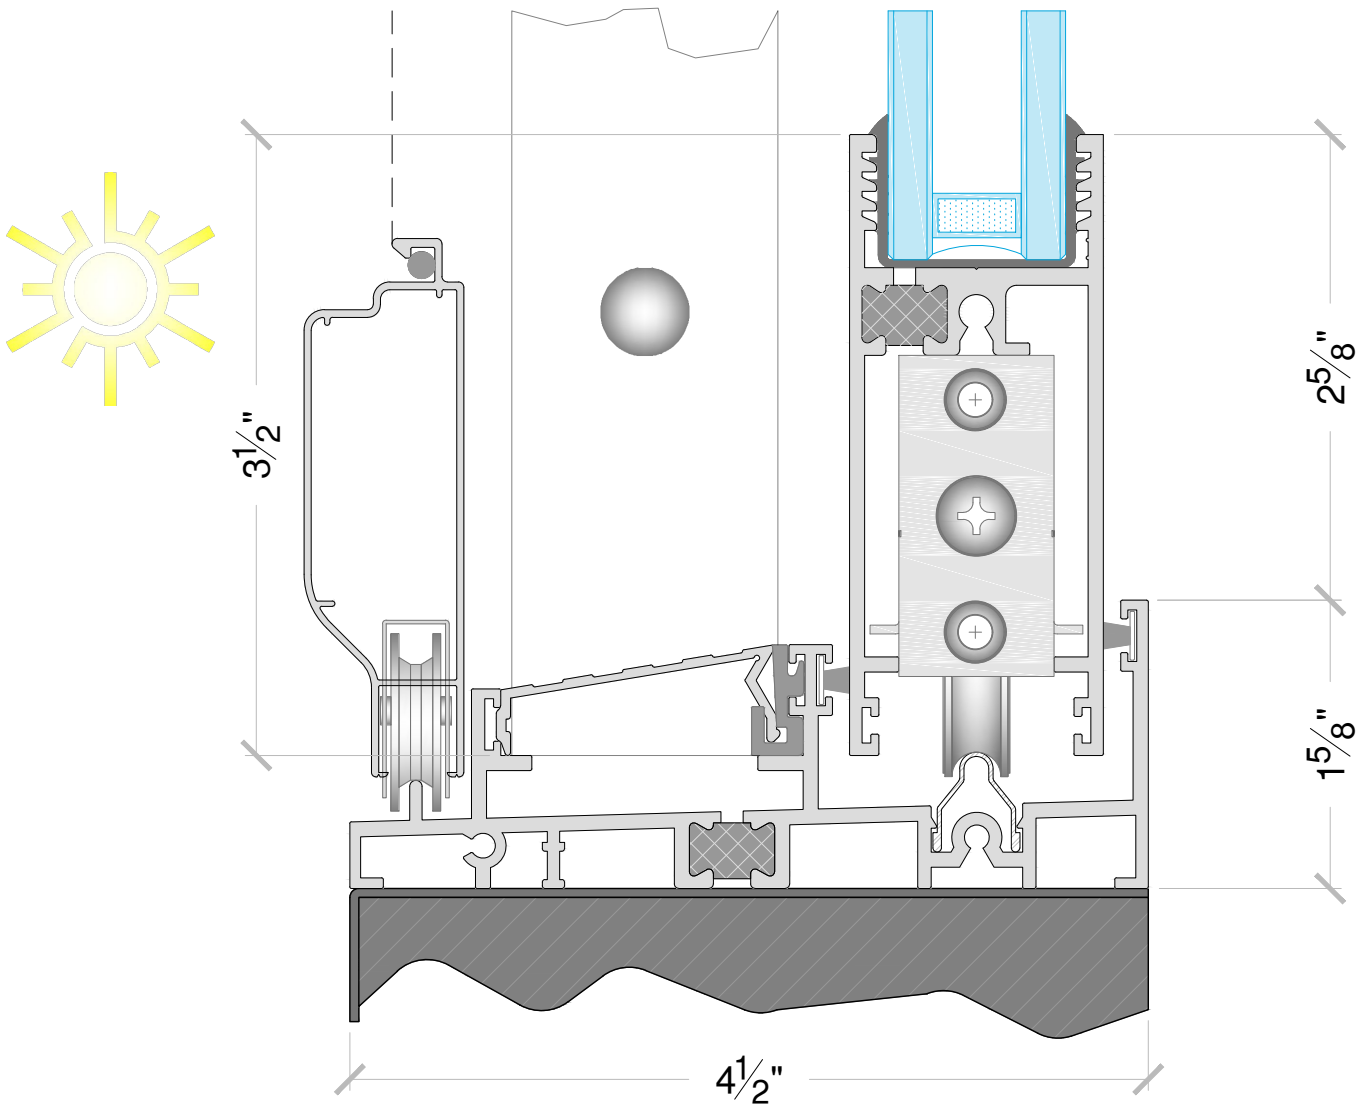


5b Standard Slide Sill w/ 3.50" Rail

4500 Series - Standard Slide

Configurations:

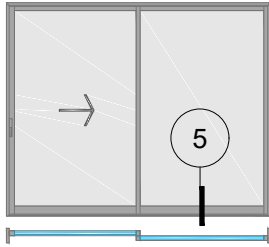

- | | |
|------|------|
| XO | OX |
| OXOR | OXOL |
| OOX | XOO |
| OXXO | |
| XOX | |

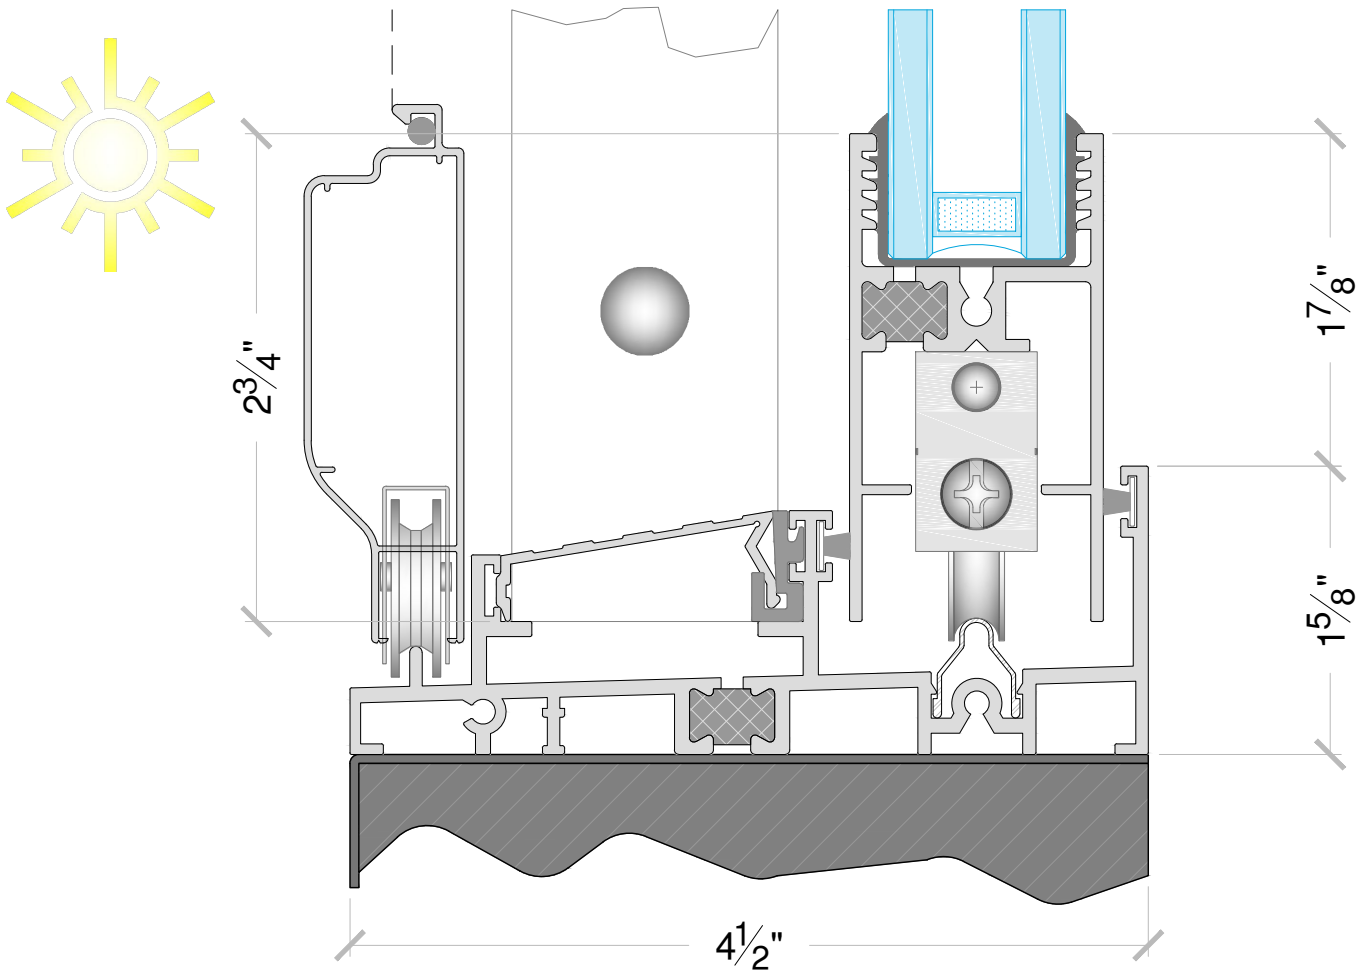



5c

Standard Slide Sill w/ 2.75" Rail

4500 Series - Standard Slide

Configurations:

OXOR OXOL

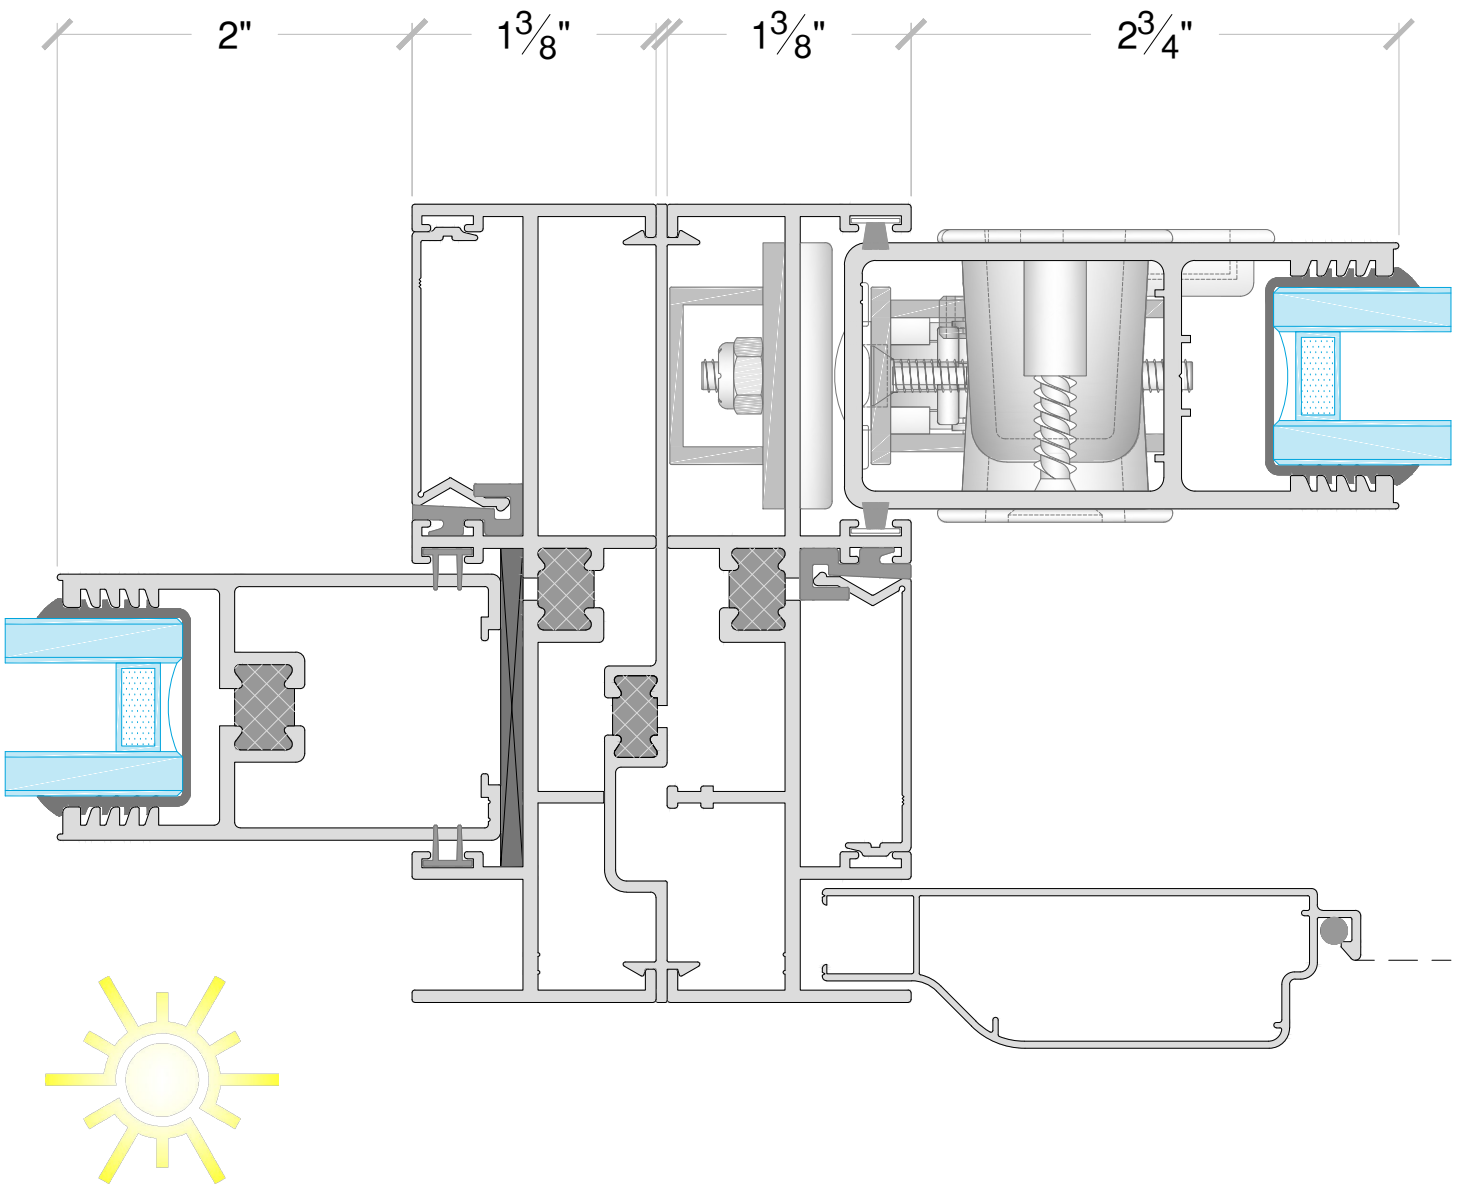




6

Standard Slide B-Jamb

4500 Series - Standard Slide

Configurations:

OOX XOO

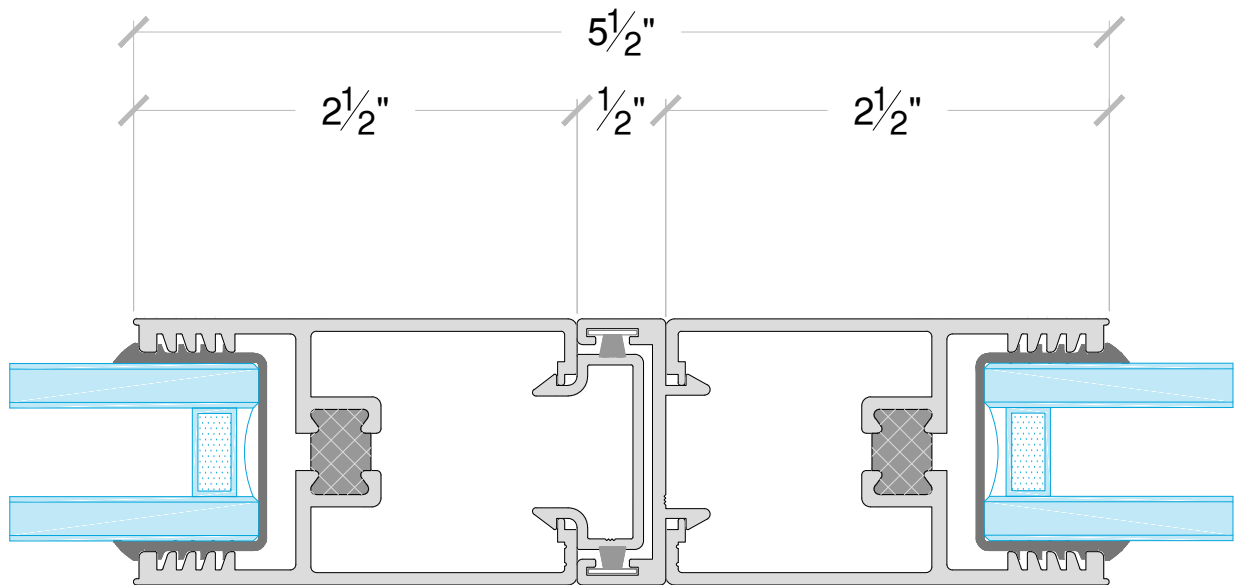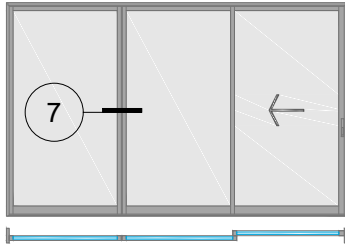





7

Standard Slide Fixed Lites

4500 Series - Standard Slide

Configurations:

OXXO

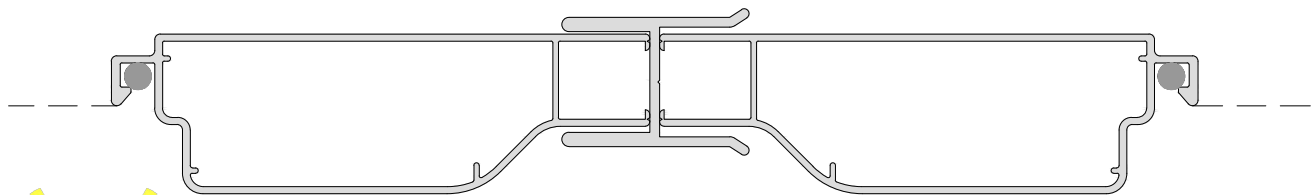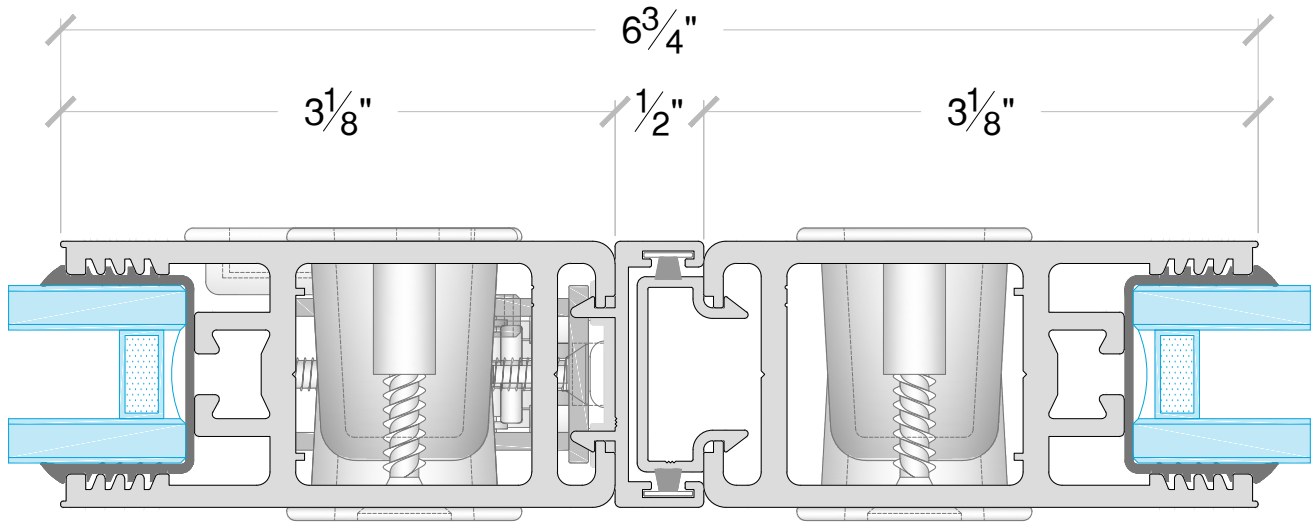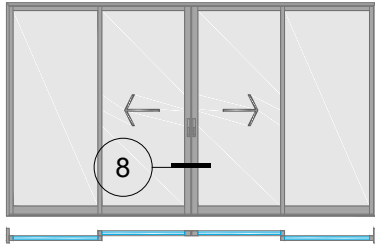

8

Standard Slide Meeting Stile